


KKM

Three-phase oil-immersed hermetically sealed
distribution transformer with Petersen coil
200kVA, 20.5±2x2.5%/0.41kV, ZNyn11+d

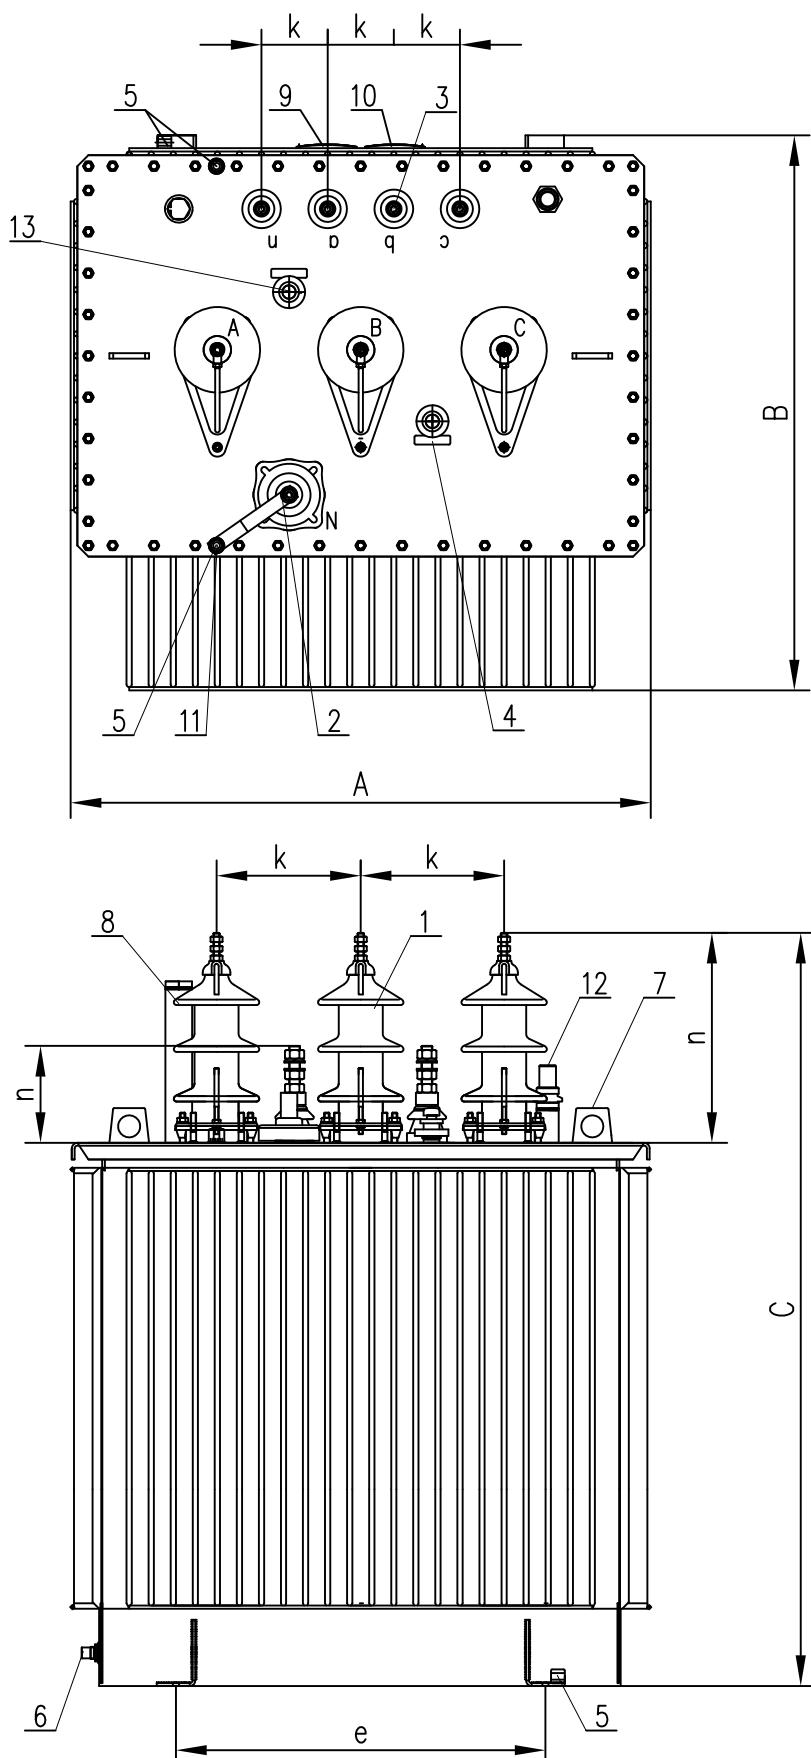

1. H.V. DIN-Bushings 24kV, 250A
2. H.V. neutral Plug-in bushing 24kV, 250A
3. L.V. DIN-Bushings 1kV, 630A
4. Reactor's tap changer
5. Earthing terminal
6. Oil drain valve
7. Lifting lugs
8. Filling tube
9. Diagram plate
10. Rated plate
11. Neutral to earthing terminal
12. Oil level indicator
13. Transformer's tap changer

kVA	A	B	C	e	k		n		Mass(kg)		CNTRd 200–20,5
					H.V.	L.V.	H.V.	L.V.	Oil	Total	
200	1140	1030	1400	520	260	120	385	178	530	1830	