


KKM ab

Three-phase hermetically sealed type
oil-immersed shunt reactor
1000(500)kVAr, 20.5kV, Y

SSHR2 1000-20,5

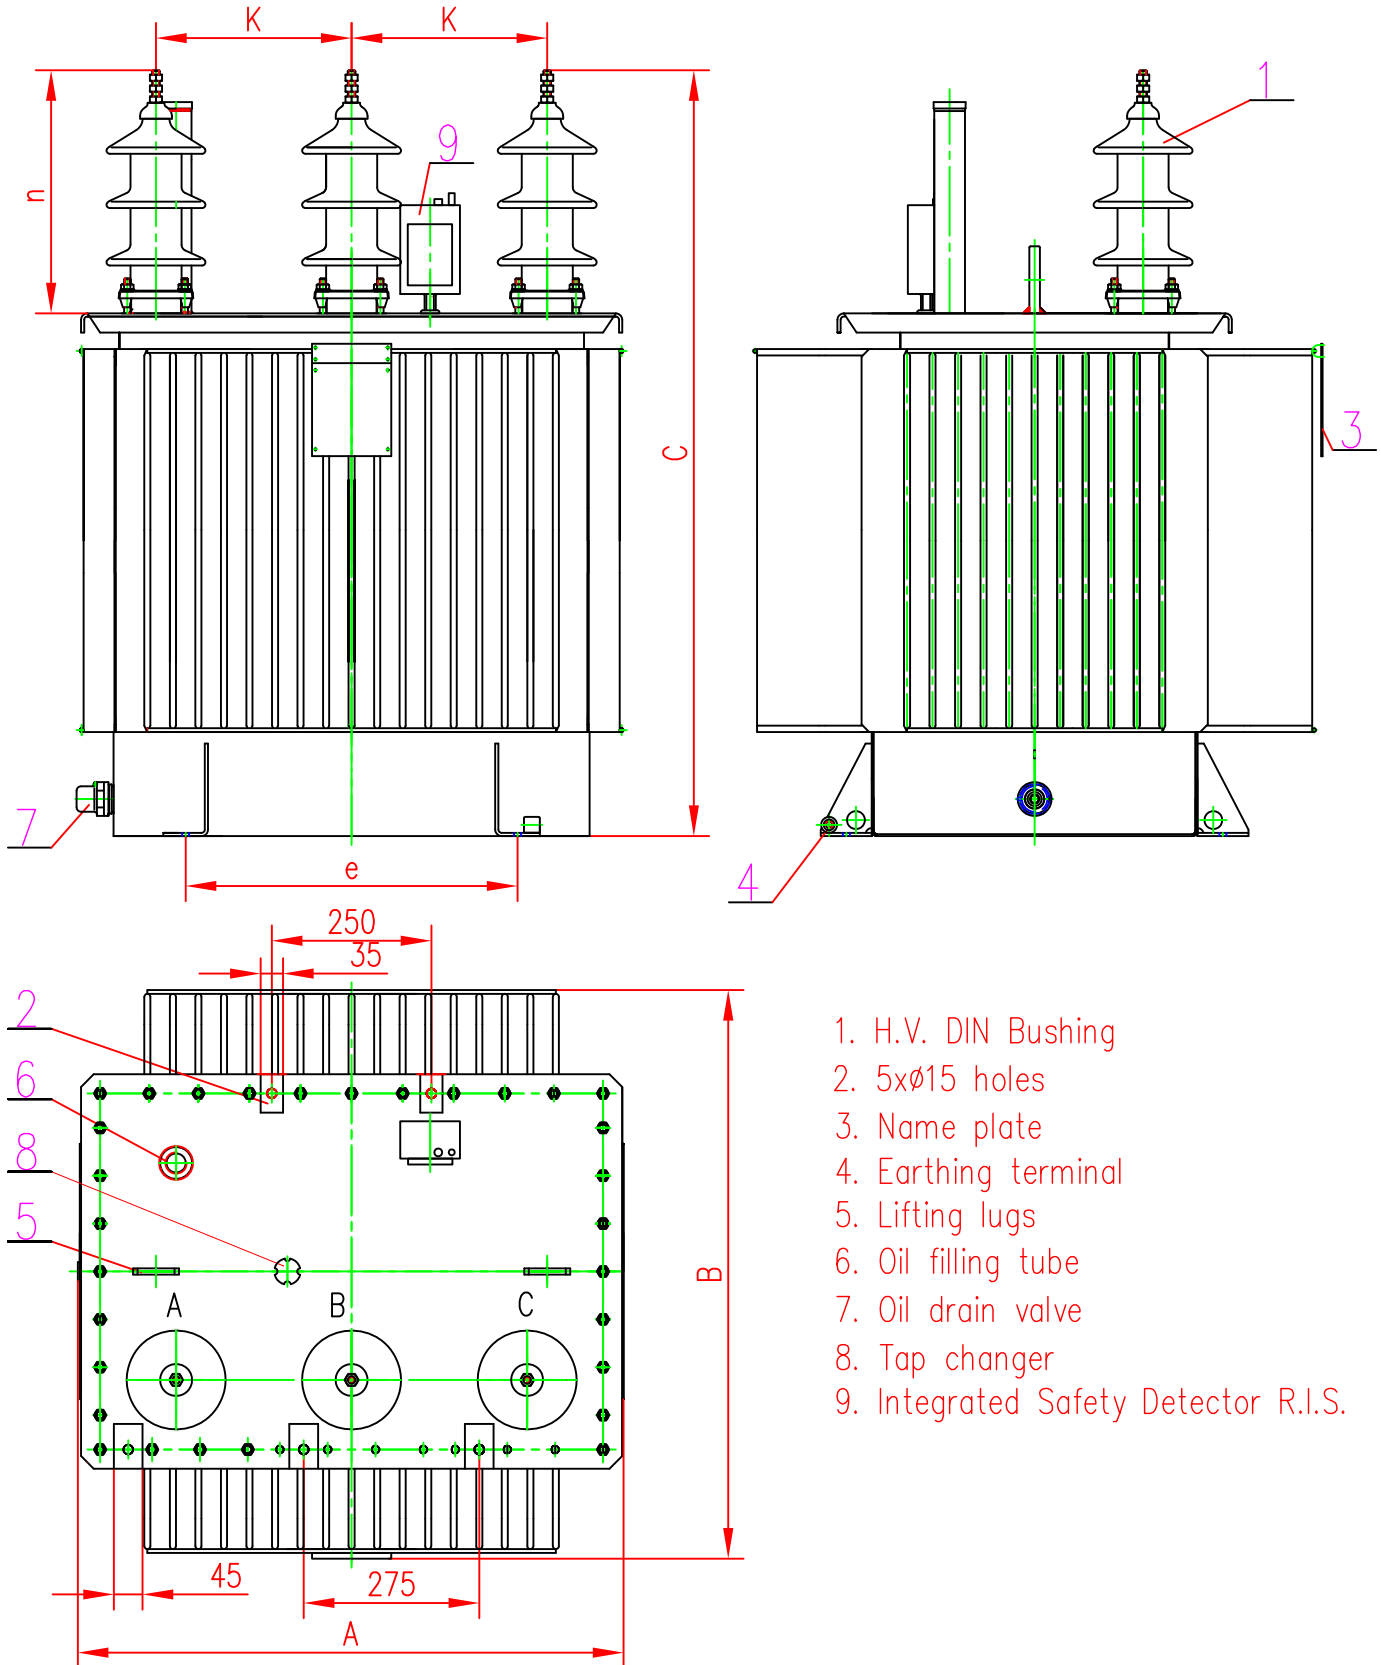

- 1. H.V. DIN Bushing
- 2. 5xØ15 holes
- 3. Name plate
- 4. Earthing terminal
- 5. Lifting lugs
- 6. Oil filling tube
- 7. Oil drain valve
- 8. Tap changer
- 9. Integrated Safety Detector R.I.S.

kVAr	A	B	C	d	e	g	l	m	k		n		Mass(kg)	
									H.V.	L.V.	H.V.	L.V.	Oil	Total
1000	1330	930	1690	-	-	-	-	-	275	-	385	-	520	2450

DIMENSIONAL DRAWING